



Ventura

FORESTRY MACHINES



TFVNMFHD · WAIKATO



max. 15 cm
[6 inch]



5 - 15 T N

PROFESSIONAL HYDRAULIC MULCHER FOR EXCAVATORS

The TFVNMFHD model is designed to handle high performance and heavy-duty work. Its structure and composition allows the attachment to clear brush up to 15 cm [6 inch] in diameter. The shredder is made of SCM-500 high yield strength steel, with two counter-blades to assist the mulching operation. Its hydraulic motor and the hydraulic drive for opening the rear door is all protected. The crusher, equipped with two hydraulic hoods, is designed to work in both directions.



STANDARD DATA

- Mulches wood and brush up to 15 cm [6 inch]
- Reinforced frame with High Yield Steel SCM.500
- Ready to be attached to a excavator (standard plate)
- Transmission with trapezoidal belts type 'B' profile
- Hydraulic motor drive to choice 25 – 64 (Fixed or variable displacement)
- Reinforced double rear doors
- Double chain protection for the operator and the environment security
- Fixed hammers with double tip of Tungsten Carbide (Widia)
- Double tempered counter-knife
- Reinforced skids with Antiwear steel plate.



PRODUCT OPTIONALS

- Attachment excavator
- Pusher ripper
- Turntable with/without attachment
- Hydraulic hoses
- Hydraulic piston for second tailgate
- Double coil electric valve for tailgate opening
- Variable displacement piston motor
- Blade type rotor with plate limiter

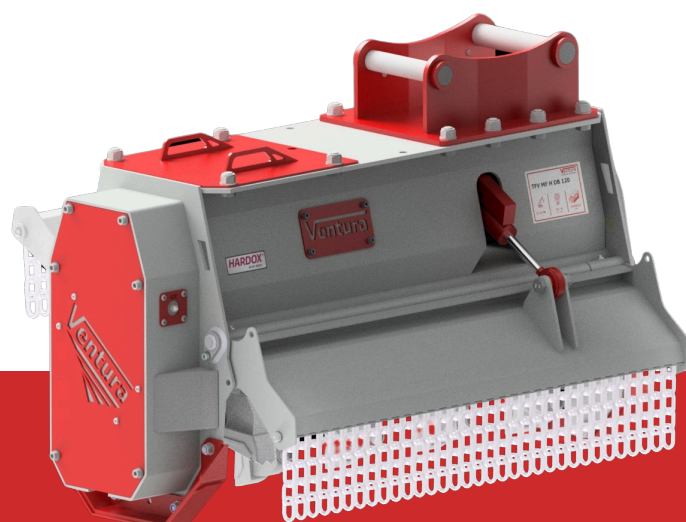
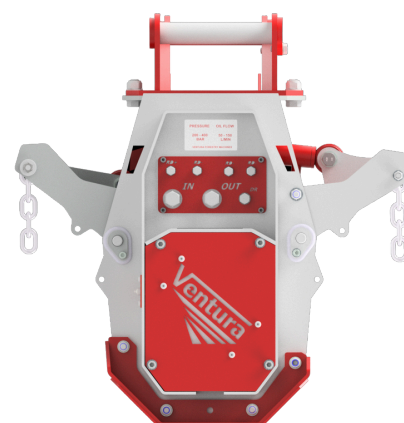


HARDOX®
WEARPARTS


TFVNMFHD · WAIKATO

DATOS TÉCNICOS


Anchura de trabajo / Working width / Largeur de travail	cm/inch	100/39	120/47
Anchura total / Overall width / Largeur hors tout	cm/inch	125/49	145/57
Tonos excavadora / Excavator tones / Tonalité de la pelle	tn / inch	5-15 / 433.981-1.301.942	5-15 / 433.981-1.301.942
Flujo de aceite / Oil flow / Débit d'huile	l/min / gpm	50-150 / 13-40	50-150 / 13-40
Presión / Pressure / Pression	Bar/psi	200-400 / 290.076-5.802	200-400 / 290.076-5.802
Peso / Weight / Poids	Kg/lb	650/1433	720/1587
Correas / Belts / Courroies	Nº	5	5
Diámetro del rotor / Rotor diameter / Diamètre du rotor	cm/inch	39 / 15.5	39 / 15.5
Martillos fijos de widia / Fixed widia hammers / Marteaux à largeur fixe	Nº	20	24

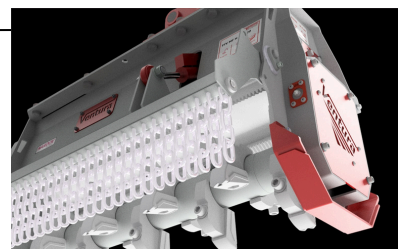

Widia fixed hammer




Reinforced mobile hammer double cutter

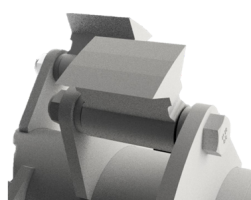

TFV H HELIX 360° Mobile Hammer

TFVNMFHD by VENTURA

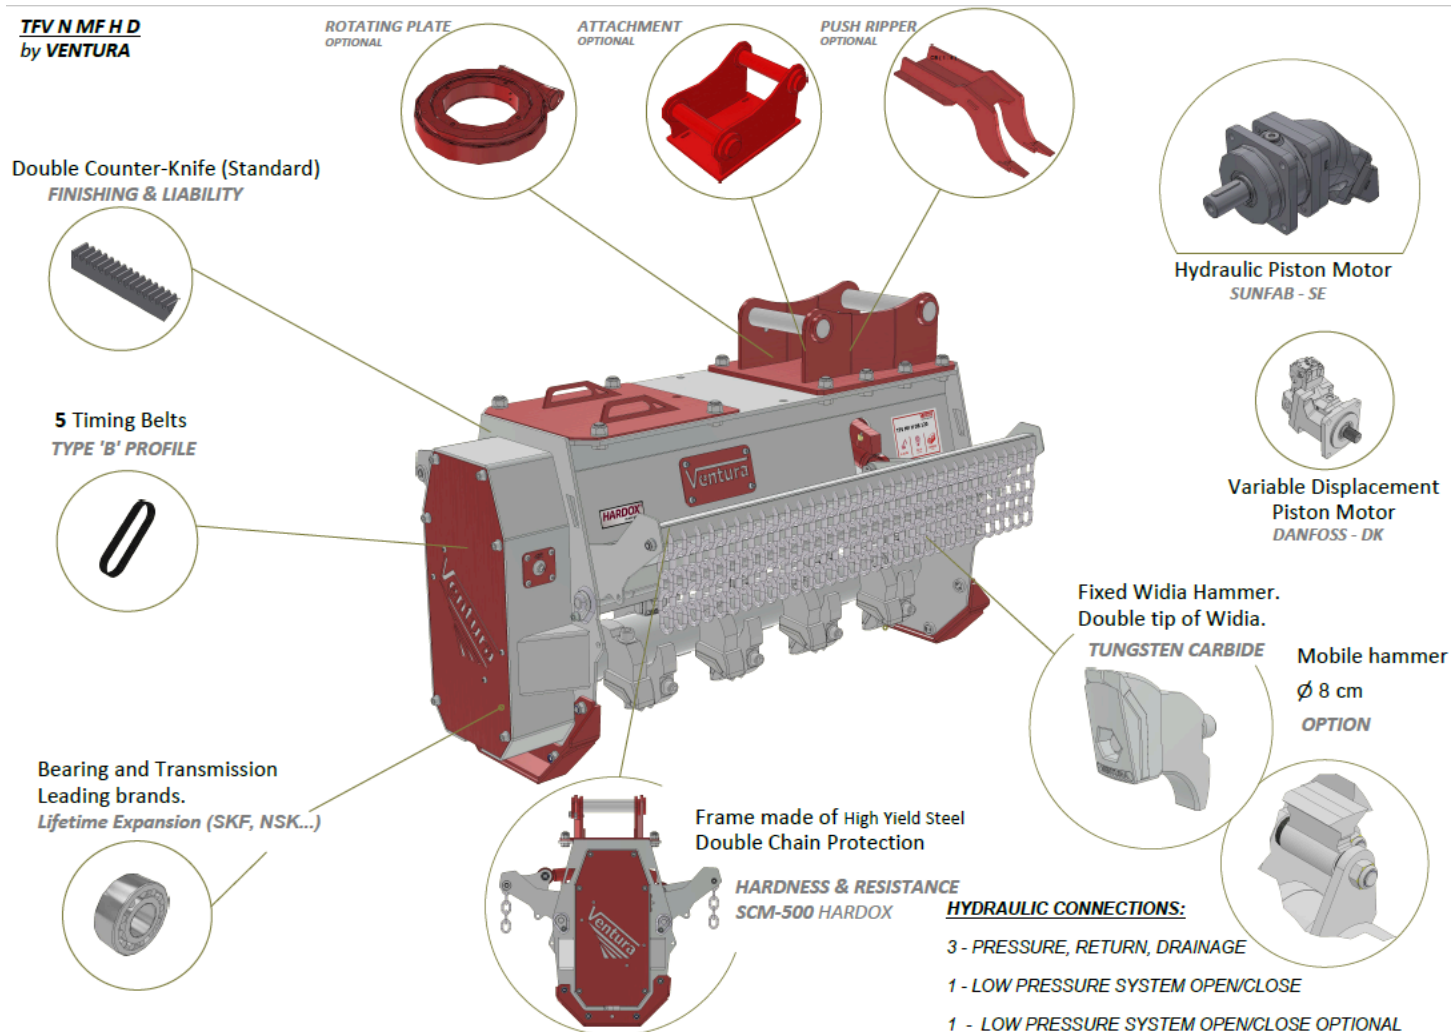

EMAIL

info@venturamaq.com

WEB

www.venturamaq.com